PAREJ EAST OCP 2011

Land Restoration / Reclamation Monitoring of more than 5 mc. m. (Coal + OB) Capacity Open Cast Coal Mines of Central Coalfields Limited Based on Satellite Data for the Year 2011



March-2012


Submitted to:
Central Coalfields Limited
Ranchi, Jharkhand



Job No 561410027 ii

Land Restoration / Reclamation Monitoring of more than 5 mc. m. (Coal + OB) capacity Open Cast Coal Mines of Central Coalfields Limited Based on Satellite Data for the Year 2011

March-2012



i

CONTENTS

	Executive Summary	iii-vi									
1.0	Background	1									
2.0	Objective	2									
3.0	Methodology	2									
4.0	Land Reclamation in Central Coalfields Limited	5									
LIST OF TABLE											
1.0 2.0	Project wise Land Reclamation Status in 5 OC projects of Status of Land Reclamation in 5 OC projects of CCL	of CCL	vi 7								
LIST OF FIG											
1 2 3-7	Project wise Land Reclamation Status in Year 2011 Methodology for Land Reclamation Monitoring Status of Land Reclamation 5 OC projects of CCL		vii 3 8-12								
	LIST OF PLATES										
1.0	Plates of Land Reclamation 5 OC projects of CC		13-15								
LIST OF PHOTOGRAPH											
1 2 3 4 5 6	Plantation on Backfilled area (2010) - Ashok OCP Avenue Plantation- Ashok OCP Plantation- Ashok OCP Plantation on Backfilled area (2011) - Piparwar OCP Plantation on OB- KD Hesalong OCP Plantation on OB- Rajrappa OCP		16 17 18 19 20								

Job No 561410027 ii

Executive Summary

1.0 Project

Land restoration / reclamation monitoring of 5 opencast coal mines of Central Coalfields Ltd. (CCL) producing 5 million cu. m. and more (Coal + OB) per year based on satellite data, regularly on annual basis.

2.0 Objective

Objective of the land restoration / reclamation monitoring is to assess the area of backfilled, plantation, social forestry, active mining area, water bodies, and distribution of wasteland, agricultural land and forest in the leasehold area of the project. This will help in assessing the progressive status of mined land reclamation and to take up remedial measures, if any, required for environmental protection.

3.0 Salient Findings

- Out of the total mine leasehold area of 47.14 Km² of the 5 OC projects Viz. Ashok, Piparwar, KD Hesalong, Parej East and Rajrappa considered for monitoring during year 2011; total excavated area is only 25.11Km² (53.27%) of which 15.95 Km² area (63.53%) has been planted, 4.56 Km² area (18.17%) has been backfilled and 4.60 Km² area (18.31%) is under active mining. It is evident from the analysis that 81.69% areas of the OC projects have already been reclaimed and balance 18.31% area is under active mining. Project wise details are given in Table-1 & Fig -1.
- On comparing the status of land reclamation carried out in year 2011 with respect to year 2010 in different projects, it is evident from the analysis that area of land reclamation has increased from 19.71 Km² (Yr.2010) to 20.51 Km² (Yr.2011) includes plantation and backfilled. This increase of 0.80 Km² area of land reclamation in one year is the result of the efforts made by CCL. Area of plantation has also increased from15.42 Km²(Yr.2010) to 15.95 Km² (Yr.2011) in 5 OC projects of CCL. Details are given in Table-2.
- Area of biological reclamation (plantation) has increased marginally in all the projects except Rajrappa projects in span of one year. This increase in area of

Job No 561410027 iii

plantation is the result of the efforts of the CCL taken up towards environmental protection.

TABLE-1 (Area in Km²)

Project wise Land Reclamation Status in OC projects of Central Coalfields Ltd

Based on Satellite data of the Year 2010 and 2011

% Calculated in respect of total Excavated area

			Plantation ii		Backfilled/OB iii		Active Mining Area		Total Excavated Area I+ii+iii		Total Reclaimed Area Ii+iii	
SI No.	Projects	Leasehold	2010	2011	2010	2011	2010	2011	2010	2011	2010	2011
1	Ashoka	5.42	1.23	1.27	0.52	0.54	1.33	1.38	3.08	3.19	1.75	1.81
			39.94	41.24	16.88	17.54	43.18	44.81			56.82	56.74
2	Piparwar	11.2	5.10	5.51	0.74	0.70	1.47	2.03	7.31	8.24	5.84	6.21
			69.77	75.38	10.12	9.58	20.11	27.78			79.89	75.36
3	KDH	4.5	1.36	1.37	0.73	0.89	0.15	0.35	2.24	2.61	2.09	2.26
			60.71	61.17	32.59	39.74	6.70	15.63			93.30	86.59
4	Parej East	6.2	0.48	0.55	0.48	0.51	0.43	0.50	1.39	1.56	0.96	1.06
			34.53	39.57	34.53	36.70	30.94	35.98			69.06	67.95
5	Rajrappa*	19.82	7.25	7.25	1.82	1.92	0.23	0.34	9.30	9.51	9.07	9.17
			77.96	77.96	19.57	20.65	2.47	3.66			97.53	96.42
		47.14	15.42	15.95	4.29	4.56	3.61	4.60	23.32	25.11	19.71	20.51
			66.12	63.53	18.40	18.17	15.48	18.31	49.47	53.27	84.52	81.69

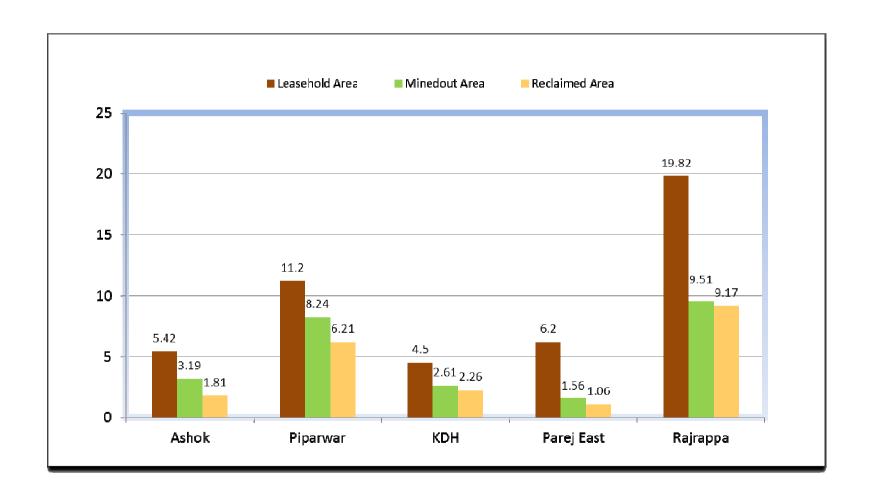


Fig. 1 : Project wise Land Reclamation Status in Year 2011

1.0 Background

- 1.1 Land is the most important natural resource which embodies soil, water, flora, fauna and total ecosystem. All human activities are based on the land which is the scarcest natural resource in our country. Mining is a site specific industry and it could not be shifted anywhere else from the location where mineral occurs. It is a fact that surface mining activities do effect the land environment due to ground breaking. Therefore, there is an urgent need to reclaim and restore the mined out land for its productive use for sustainable development of mining. This will not only mitigate environmental degradation, but would also help in creating a more congenial environment for land acquisition by coal companies in future.
- Keeping above in view, Coal India Ltd. (CIL) issued a work order vide letter no. CIL/WBP/Env./2009/2428 dated 29.12.2009 to Central Mine Planning & Design Institute (CMPDI), Ranchi, for monitoring land reclamation. Status of all the opencast coal mines having production of more than 5 million m³ per annum (coal + OB taken together per annum) based on remote sensing satellite data, regularly on annual basis for sustainable development of mining. Further, another work order vide letter no. CIL/WBP/ENV./2011dated23/08/11was issued by CIL for monitoring of less than 5 million m³ per annum capacity (Coal +OB) projects from the year 2011 at interval of three years. The result of land reclamation status of all such mines to be put on the website of CIL, (www.coalindia.in), CMPDI (www.cmpdi.co.in) and the concerned coal companies in public domain. Detail report to be submitted to Coal India and respective subsidiaries.
- 1.3 Land reclamation monitoring of all open cast coal mining projects would also comply the statutory requirements of Ministry of Environment & Forest (MoEF). Such monitoring would not only facilitate in taking timely mitigation measures against

environmental degradation, but would also enable coal companies to utilize the reclaimed land for larger socio-economic benefits in a planned way.

1.4 Present report is embodying the finding of the study based on satellite data of the year 2011 carried out for 5 no of OC projects of capacity more than 5 mcm (coal +OB) for Central Coalfields Ltd.

2.0 Objective

Objective of the land reclamation/restoration monitoring is to assess the area of backfilled, plantation, OB dumps, social forestry, active mining area, settlements and water bodies, distribution of wasteland, agricultural land and forest land in the leasehold area of the project. This is an important step taken up for assessing the progressive status of mined land reclamation and for taking up remedial measures, if any, required for environmental protection.

3.0 Methodology

There are number of steps involved between raw satellite data procurement and preparation of final map. National Remote Sensing Centre (NRSC) Hyderabad, being the nodal agency for satellite data supply in India, provides only raw digital satellite data, which needs further digital image processing for extracting the information and map preparation before uploading the same in the website. Methodology for land reclamation monitoring is given in given in fig 2. Following steps are involved in land reclamation /restoration monitoring:

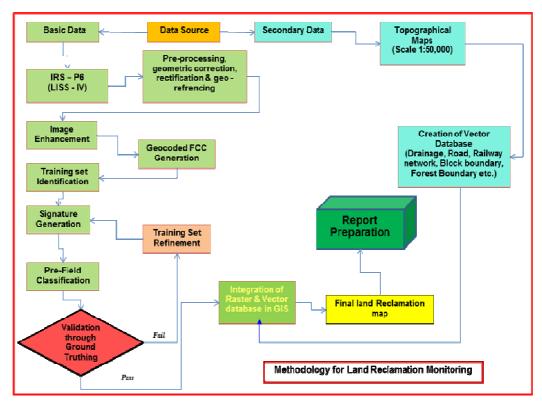


Figure: 2 Methodology for Land Reclamation Monitoring

- **3.1 Data Procurement:** After browsing the data quality and date of pass on internet, supply order for data is placed to NRSC. Secondary data like leasehold boundary, topo sheets are procured for creation of vector database.
- **3.2 Satellite Data Processing:** Satellite data are processed using ERDAS IMAGINE digital image processing s/w. Methodology involves the following major steps:
- Rectification & Georeferencing: Inaccuracies in digital imagery may occur due to 'systematic errors' attributed to earth curvature and rotation as well as 'non-systematic errors' attributed to satellite receiving station itself. Raw digital images contain geometric distortions, which make them unusable as maps. Therefore, georeferencing is required for correction of image data using ground control points (GCP) to make it compatible to Sol toposheet.

Job No 561410027 3

• Image enhancement:

To improve the interpretability of the raw data, image enhancement is necessary. Local operations modify the value of each pixel based on brightness value of neighbouring pixels using ERDAS IMAGINE 9.3 s/w. and enhance the image quality for interpretation.

Training set selection

Training set requires to be selected, so that software can classify the image data accurately. The image data are analysed based on the interpretation keys. These keys are evolved from certain fundamental image-elements such as tone/colour, size, shape, texture, pattern, location, association and shadow. Based on the image-elements and other geo-technical elements like land form, drainage pattern and physiography; training sets were selected/identified for each land use/cover class. Field survey was carried out by taking selective traverses in order to collect the ground information (or reference data) so that training sets are selected accurately in the image. This was intended to serve as an aid for classification.

Classification and Accuracy assessment

Image classification is carried out using the maximum likelihood algorithm. The classification proceeds through the following steps: (a) calculation of statistics [i.e. signature generation] for the identified training areas, and (b) the decision boundary of maximum probability based on the mean vector, variance, covariance and correlation matrix of the pixels. After evaluating the statistical parameters of the training sets, reliability test of training sets is conducted by measuring the statistical separation between the classes that resulted from computing divergence matrix. The overall accuracy of the classification was finally assessed with reference to ground truth data.

Area calculation

The area of each land use class in the leasehold is determined using ERDAS IMAGINE v. 9.3software and given in table 2.

Overlay of Vector data base

Vector data base created based on secondary data. Vector layer like drainage, railway line, leasehold boundary, forest boundary etc. are superimposed on the image as vector layer in the Arc GIS database.

• Pre-field map preparation

Pre-field map is prepared for validation of the classification result

3.3 Ground Truthing:

Selective ground verification of the land use classes are carried out in the field and necessary corrections if required, are incorporated before map finalization.

3.4 Land reclamation database on GIS:

Land reclamation database is created on GIS platform to identify the temporal changes identified from satellite data of different cut-off dates.

4.0 Land Reclamation Status in Central Coalfields Ltd.

- **4.1** Following 5 OC projects producing more than 5 million m³. (Coal + OB together)of Central Coalfields Ltd. have been taken up during the year 2011 for land reclamation monitoring:
 - Ashok
 - Piparwar
 - KD Hesalong
 - Parej East
 - Rajrappa

Job No 561410027 5

- 4.2 Area statistics of different land use classes present in OC projects in the year 2011 is given in Table 2. Land use maps derived from the satellite data is given in Plate no. 1 to 5. Changes in land use status are shown in Fig. 3 7 and field photographs showing plantation and backfilled area in mining projects in photo 1-6.
- **4.3** Study reveals that 81.69% of excavated mining area has already been reclaimed by CCL in above 5 OC projects, out of which 63.53% area has been revegitated and 18.17% area are backfilled.
- 4.4 After analyzing the satellite data of year 2010 vs. 2011, it is evident that plantation carried out on backfilled area, OB dumps as well as under social forestry in all the 5 mines of CCL has marginally increased to the extent of 0.53 Km² in span of last one year.
- 4.5 It may be seen from the table.1 that area of total reclamation has increased in the year 2011 in comparison to year 2010 but in terms of percentage it has been reduced due to increase of total excavated area in the year 2011.

6

Table-2 STATUS OF LAND RECLAMATION IN CENTRAL COALFIELDS LTD. BASED ON SATELLITE DATA OF THE YEAR 2011

		Ash	Licentoids.	Pipa		KD Hes			appag		rej East
REST	Dense Forest	Area 0.00	% 0.00	Area 0.01	% 0.09	Area 0.01	% 0.22	Area 0.05	% 0.25	Area 0.01	% 0.16
FOR	Open Forest	0.63	11.62	0.65	5.80	0.16	3.56	0.38	1.92	1.36	21.94
	Total Forest	0.63	11.62	0.66	5.89	0.17	3.78	0.43	2.17	1.37	22.10
SCRUB	Scrubs	0.54	9.96	0.44	3.93	0.60	13.33	6.10	30.78	1.70	27.42
š	Social Forestry	0.32	5.90	2.74	24.46	0.15	3.33	1.80	9.08	0.10	1.61
TION	Plantation on OB Dump	0.95	17.53	2.77	24.73	1.22	27.11	5.45	27.50	0.45	7.26
ANTAT	Total Plantation(Biological Reclamation) Total Vegetation		23.43 45.02	5.51 6.61	49.20 59.02	1.37 2.14	30.44 47.56	7.25 13.78	36.58 69.53	0.55 3.62	8.87 58.39
E		0.78	14.39	1.18	10.54	0.20	4.44	0.22		0.40	6.46
**	Coal Quarry Coal Face	0.78	14.39	0.07	0.63	0.20	0.00 0.22	0.22		0.40	0.00
MINING	Advance quarry site	0.40	7.38	0.43	3.84	0.11	2.44	0.01	0.05	0.01	0.16
ACTIVE	Coal Dump	0.10	1.85	0.35	3.13	0.03	0.67	0.10	0.50	0.13	2.10
AC	Total Active Mining Area	1.38	25.46	2.03	18.14	0.35	7.78	0.34	1.72	0.55	8.72
	Barren OB Dump	0.54	9.96	0.70	6.24	0.89	19.78	1.92	9.69	0.51	8.23
0	Barren backfilled area										
AIMIRD	Waterfilled quarry Total Area Under Technical Reclamation	0.54	9.96	0.70	6.24	0.89	19.78	1.92	9.69	0.51	8.23
RECL							72.2.2.2.2				
~	Total Area Under Mine Oparation	1.92	35.42	2.73	24.38	1.24	27.56	2.26	11.40	1.06	17.09
Hin	Crop lands	0.01	0.18	0.03	0.26	0.00	0.00	0.32	1.61	0.50	8.06
Agric	Fallow Land Total Agricultural	0.78 0.79	14.39 14.58	0.42 0.45	3.75 4.01	0.00 0 .00	0.00 0.00	1.24 1.56	6.26 7.87	0.01 0.51	0.16 8.23
56	Wastelands	0.15	2.77	0.22	1.96	0.63	14.00	0.78	3.94	0.07	1.13
ands	Fly Ash Pond										
Waste	Sand Body	0.00	0.00	0.03	0.27	0.00	0.00	0.03	0.15	0.01	0.00
-	Total Wastelands	0.15	2.77	0.25	2.23	0.63	14.00	0.81	4.09	0.08	1.30
	Urban Settlement	0.00	0.00	0.00	0.00	0.26	5.78	0.43	2.17	0.23	3.70
T S	Rural Settlement	0.08	1.48 0.00	0.55	4.91	0.00	0.00	0.18	0.91	0.42	6.77
Settle	Industrial Settlement	0.01		0.41	3.66	0.01	0.22	0.21	1.06	0.10	1.61
100	Total Settelements(E)	0.09	1,66	0.96	8.57	0.27	6.00	0.82	4.14	0.75	12.09
1	Waterbodies(F)	0.03	0.55	0.20	1.79	0.22	4.89	0.59	2.98	0.18	2.90
ì	Grand Total	5.42	100.00	11.20	100.00	4.50	100.00	19.82	100.00	6.20	100.00

7

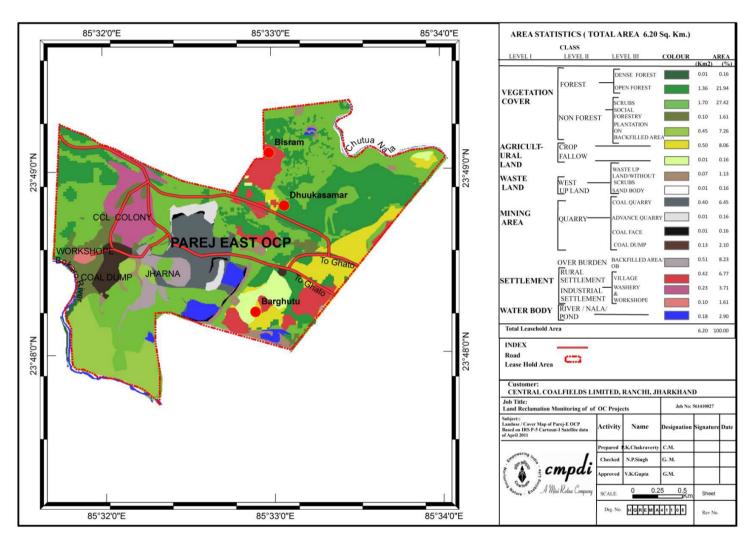


Plate - 5

8

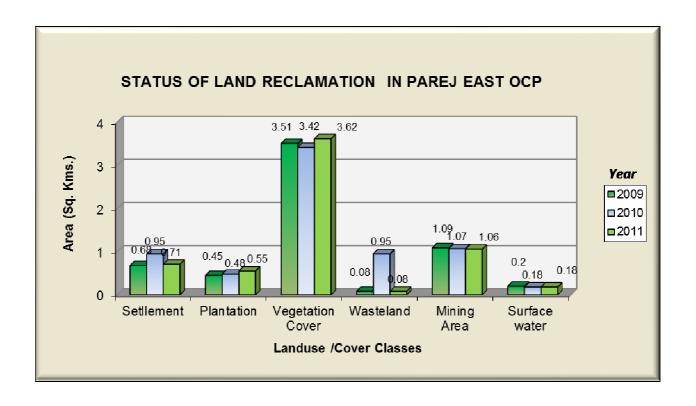


Figure 7



Gondwana Place, Kanke Road, Ranchi 834031, Jharkhand Phone : (+91) 651 2230001, 2230002, 2230483, FAX (+91) 651 2231447, 2231851 Wesite : www.cmpdi.co.in, Email : cmpdihq@cmpdi.co.in